

SIGN LEGEND



- | | | | |
|---|---|---|---|
| (A) 80-9707
EAST 51-8812
51-8815
NORTH 51-6611
169 51-8846 | (B) 80-9707
WEST 51-8814
51-8815
SOUTH 51-6613
169 51-8845 | (B) 80-9707
WEST 51-8814
51-8815
SOUTH 51-6613
169 51-8845 | (A) 80-9707
EAST 51-8812
51-8815
NORTH 51-6611
169 51-8848 |
| (C) 51-2626R | (E) 51-2626L | (D) 51-2625 | (E) 51-2626L |
| (F) 80-9805 | 31-0553 | (G) 80-9708 | |
| (J) 31-0557 | 80-9050 | (H) 80-9702 | (I) 80-9701 |
| (N) 80-9928
44 EAST 169 NORTH
700 FT NORTH OF MURDOCK RD | (L) 80-9080 | (R) 80-9928 | |
| (Q) 80-8078
1.75 MILES AHEAD
LOCAL TRAFFIC ONLY | (P) 80-8078
1/2 MILE AHEAD
LOCAL TRAFFIC ONLY | | |
| (M) 80-9078
700 FT AHEAD
LOCAL TRAFFIC ONLY | (D) 80-9928
44 WEST 169 SOUTH
1.75 MILES AHEAD | | |

SIGNING SYMBOL CONVENTION

- ↑ SHEET ALUMINUM SIGN W/ 1 POST
- ↑ SHEET ALUMINUM SIGN W/ 2 POSTS
- ▭ CONSTRUCTION BARRICADE TYPE III
- ▭ CONSTRUCTION BARRICADE MOUNTED SIGN

GENERAL NOTES

- ALL SIGN LOCATIONS INDICATED ON THE PLAN ARE ONLY APPROXIMATE. EXACT LOCATIONS SHALL BE DETERMINED IN THE FIELD AS DIRECTED BY THE ENGINEER.
 - DETOUR SIGNS SHALL BE COVERED WHEN THE DETOUR IS NOT IN OPERATION.
 - DETOUR SIGNS SHALL BE REMOVED WHEN THE DETOUR IS NO LONGER REQUIRED.
 - EXISTING SIGNS, WHICH CONFLICT, WITH THE DETOUR SIGNS SHALL BE COVERED AS DIRECTED BY THE ENGINEER.
 - THE COST OF THE DETOUR SIGNS SHALL BE PAID FOR UNDER ITEM # 1220027 CONSTRUCTION SIGNS.
 - TWO WEEKS PRIOR TO INITIATING DETOUR, INSTALL SIGN NO. 80-9928 ON ROUTE 169 IN BOTH DIRECTIONS IN VICINITY OF BRIDGE. THESE SIGNS SHALL BE REMOVED ONCE THE DETOUR IS IN EFFECT.
- | | |
|--|---------------------------|
| STARTING [DATE]
ROUTE 169
CLOSED | INSERT
CLOSURE
DATE |
|--|---------------------------|
- ▲ INSTALL 1 STOP SIGN (31-0553), A STOP AHEAD SIGN (80-9052), AND A 12" WIDE STOP BAR (PLASTIC PAVEMENT MARKING TAPE) AT THE FOLLOWING APPROACHES:
 - ROUTE 97 N.B. AT S.R. 644.
 - ROUTE 169 N.B. AT S.R. 644.
 - ROUTE 169 S.B. AT S.R. 644.

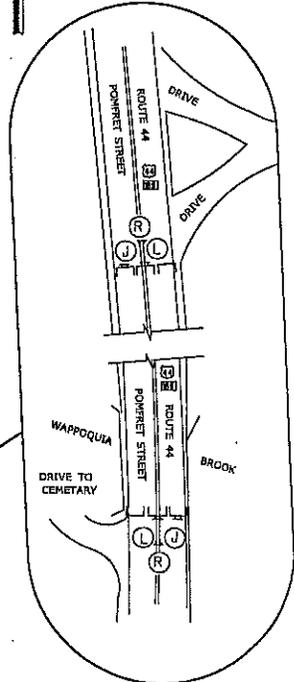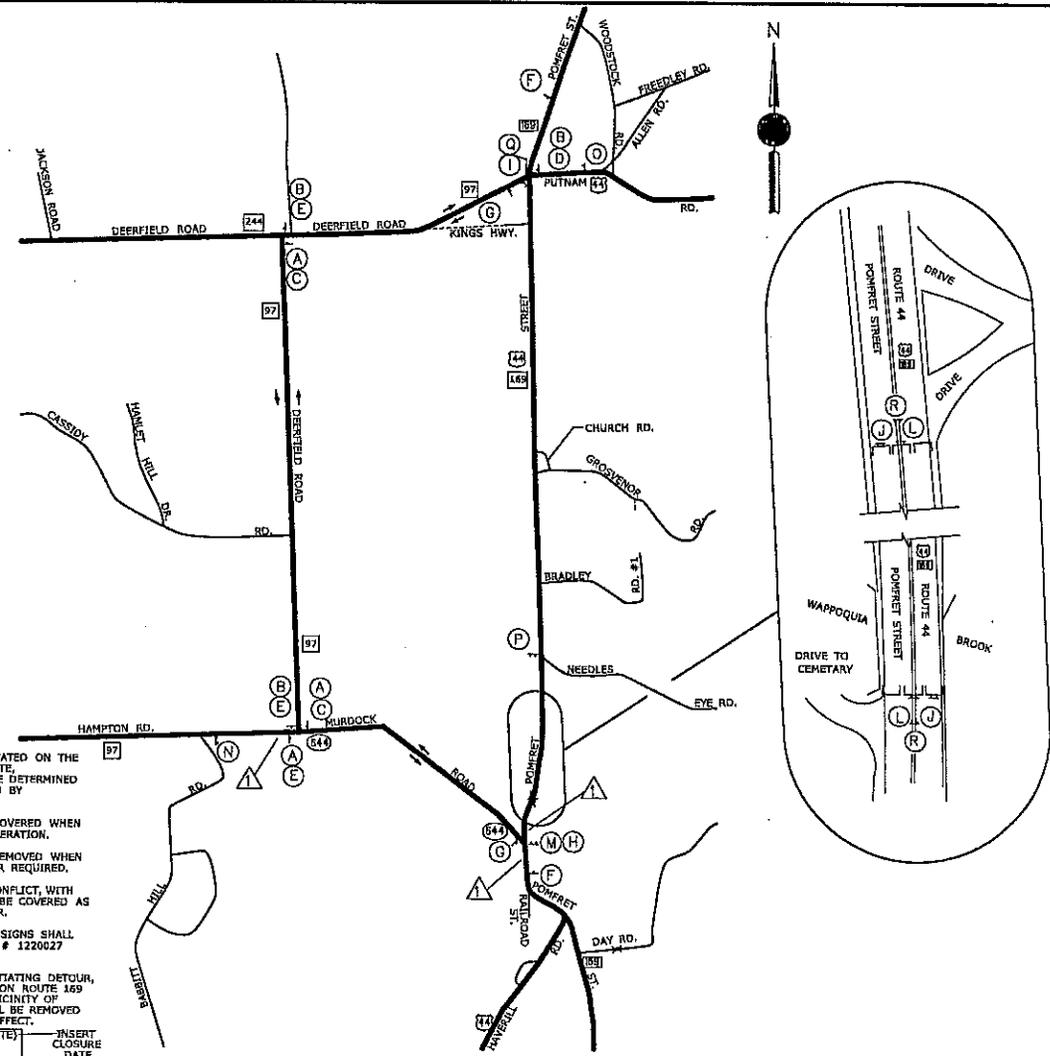

	DESIGN/PROJECT M. CLOUTIER CHECKED BY B. SMITH NOT TO SCALE	<p>STATE OF CONNECTICUT DEPARTMENT OF TRANSPORTATION</p>	ENGINEER OFFICE OF ENGINEERING APPROVED BY <i>Mark Mahood</i>	PROJECT TITLE REPLACEMENT OF U.S. ROUTE 44 OVER WAPPOQUIA BROOK BRIDGE NO. 00990	TOWN POMFRET DRAWING TITLE DETOUR PLAN	PROJECT NO. 111-119 DESIGN TITLE DTR-01 SHEET NO. 05.02
--	---	--	--	--	---	---